


DIMENSIONS MARKED THIS WAY ARE IMPORTANT & MUST BE MAINTAINED

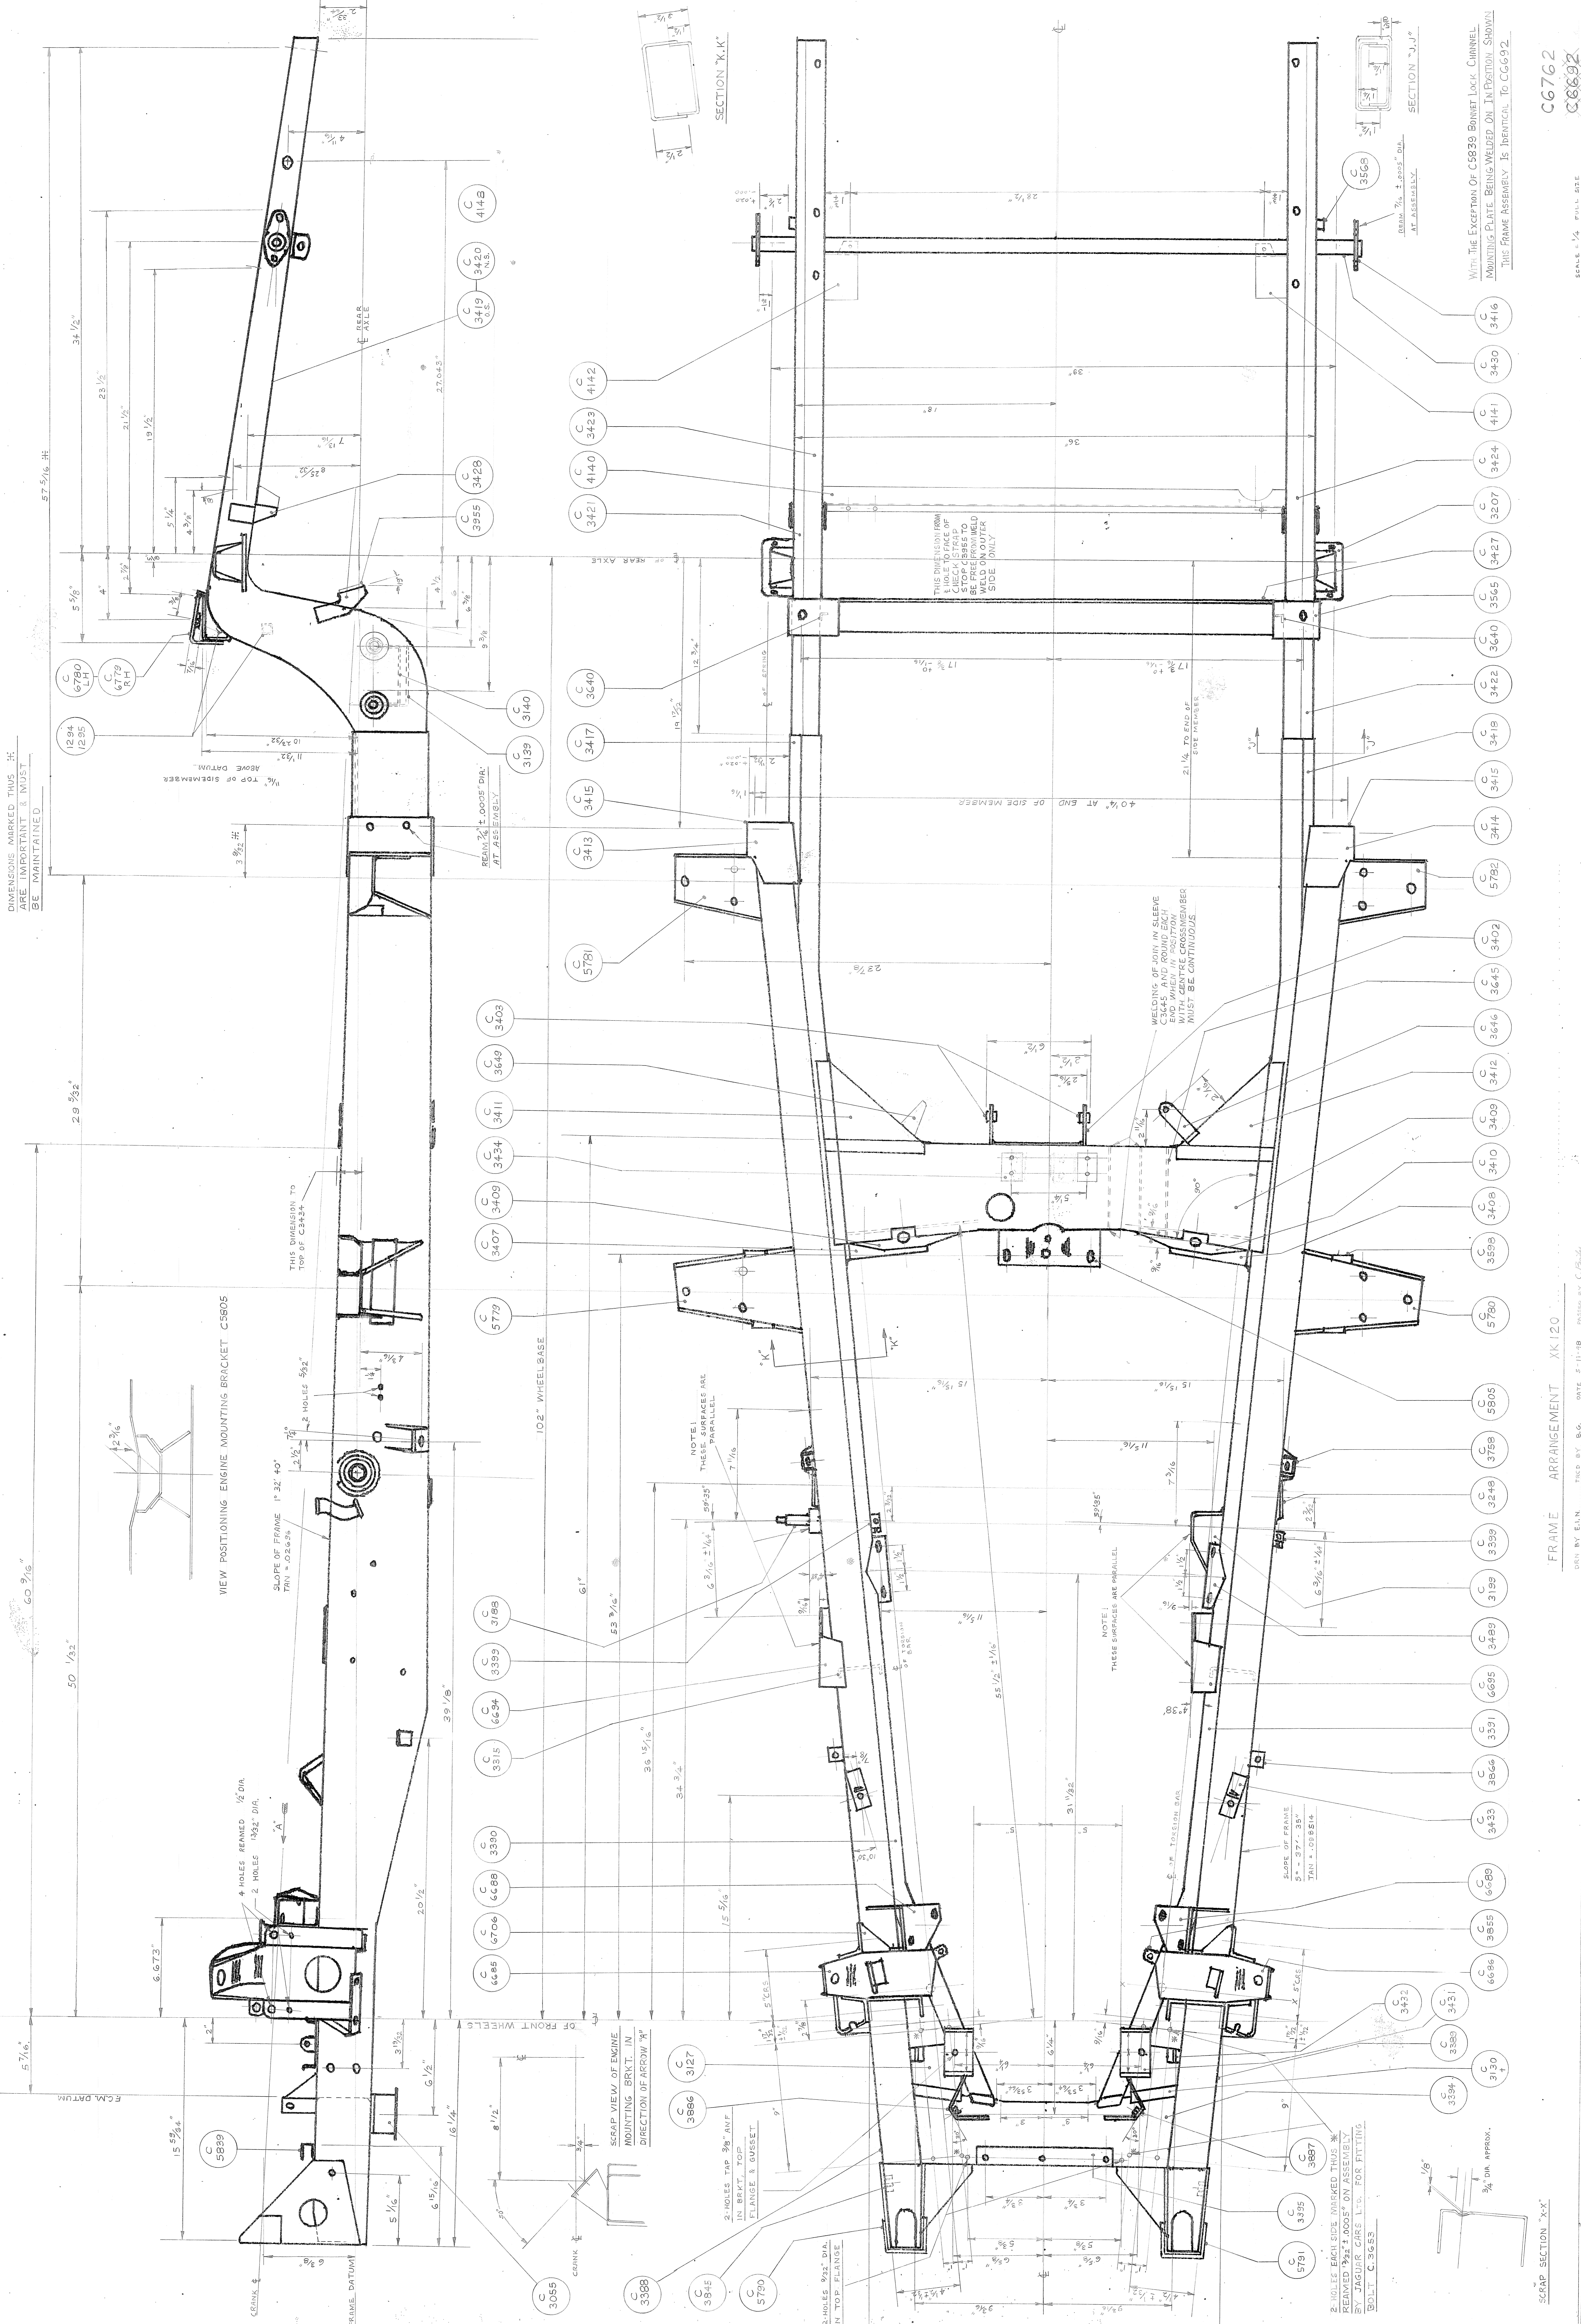

VIEW POSITIONING ENGINE MOUNTING BRACKET C5805

SCRAP VIEW OF ENGINE MOUNTING BRKT. IN DIRECTION OF ARROW 'X'

SECTION 'X-X'

SECTION 'J-J'

2 HOLES EACH SIDE MARKED THUS * REMOVED 1/2" ± 0.005" DIA. ON ASSEMBLY BY JAGUAR CARE LTD. FOR FITTING BOLT C.3655

THIS DIMENSION FROM HOLE TO EDGE OF CHECK STRAP STOP C.3865 TO BE MAINTAINED WELD ON OUTER SIDE ONLY

WELDING OF JOINT IN SLEEVE MUST BE CONTINUOUS WITH CENTRE CROSSMEMBER

REAR 7/16" ± 0.005" DIA. AT ASSEMBLY

WITH THE EXCEPTION OF C5839 BOWMET LOCK CURNELL MOUNTING PLATE BEING WELDED ON IN POSITION SHOWN THIS FRAME ASSEMBLY IS IDENTICAL TO C6692