
t panel er left), oer left) switch /arning eutchwings e road on (to e left) e key gauge pres-right aiths auge om-SB SS lged on left, ock

Bakelite oil level push button (bottom right). The speedometer was calibrated clockwise up to 140 mph/240 kmh, the speed being sealed in steps of 10 mph/20 kmh, both beginning at zero. A red head-



ign bulb holder

 Early OTS instrument pate C.2743 (uncil Occober 1952, classi C.2743 (uncil Occober 1952, classi (LHD))
Dashboard illumination by and blue celluloid inserts to instruments blue celluloid inserts to instruments (pictured here: ammeter) (pictured here: ammeter)
Manufacture's marks: rear earl of the ammeter C.2753 (lucal of the ammeter)
and of the lightion seatch

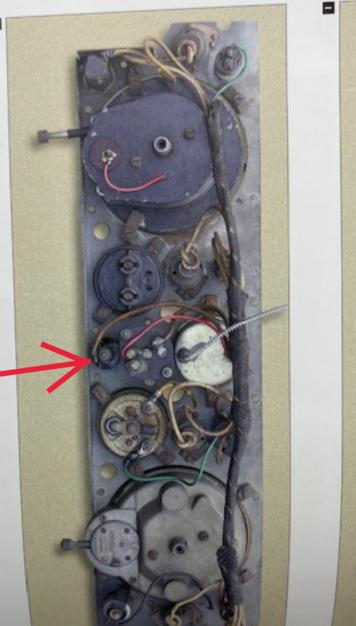



D

) 200